


**RB/WB prosthetics** – fit on RB and WB implants (∅ 3.75 mm - ∅ 6.5 mm)

- crowns with slim emergence profiles
- bridges



**WB prosthetics** – fit only on WB implants (∅ 5.5 mm - ∅ 6.5 mm)

- crowns with wide emergence profiles

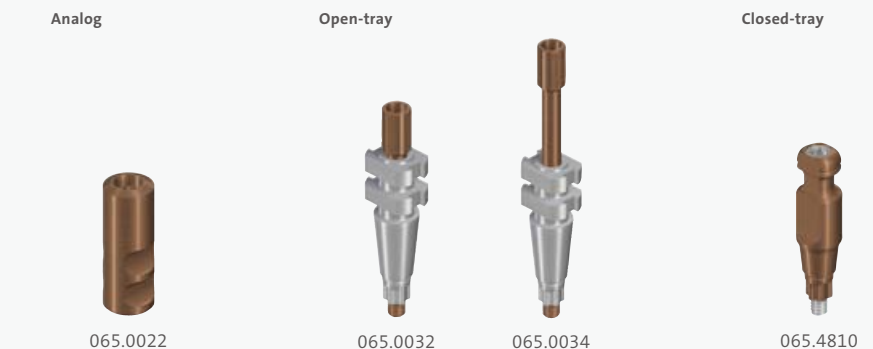

Temporary Abutments for Crown

|    |        | ∅ 3.8 mm (RB/WB) | ∅ 4.5 mm (RB/WB) | ∅ 6.0 mm (RB/WB) |
|----|--------|------------------|------------------|------------------|
| GH | 1.5 mm | 064.4362         | 064.4372         | -                |
|    | 2.5 mm | 064.4363         | 064.4373         | 064.4382         |
|    | 3.5 mm | 064.4364         | 064.4374         | 064.4383         |

Temporary Abutments for Bridge

|    |        | ∅ 4.5 mm (RB/WB) |
|----|--------|------------------|
| GH | 1.5 mm | 064.4352         |

Temporary Abutments for Crown

|    |         | ∅ 5.5 mm (WB) |
|----|---------|---------------|
| GH | 0.75 mm | 064.4391      |
|    | 1.5 mm  | 064.4392      |
|    | 2.5 mm  | -             |
|    | 3.5 mm  | -             |

Variobase® for Crown

|    |        | ∅ 3.8 mm (RB/WB) | ∅ 4.5 mm (RB/WB) |
|----|--------|------------------|------------------|
| GH | 1.5 mm | 062.4934         | 062.4944         |
|    | 2.5 mm | 062.4935         | 062.4945         |
|    | 3.5 mm | 062.4936         | 062.4946         |

Variobase® for Crown AS

|    |        | ∅ 4.5 mm (RB/WB) |
|----|--------|------------------|
| GH | 1.5 mm | 062.4972         |

Variobase® for Bridge/Bar Cylindrical

|    |        | ∅ 4.5 mm (RB/WB) |
|----|--------|------------------|
| GH | 1.5 mm | 062.4961         |

Variobase® for Crown

|    |         | ∅ 5.5 mm (WB) |
|----|---------|---------------|
| GH | 0.75 mm | 062.4953      |
|    | 1.5 mm  | 062.4954      |
|    | 2.5 mm  | -             |
|    | 3.5 mm  | -             |

Variobase® for Crown AS

|    |        | ∅ 5.5 mm (WB) |
|----|--------|---------------|
| GH | 1.5 mm | 062.4971      |

Burn-out Copings for Variobase® for Crown

|  |  | ∅ 3.8 mm (RB/WB) | ∅ 4.5 mm (RB/WB) |
|--|--|------------------|------------------|
|  |  | 065.0014         | 065.0015         |

Basal Screw

|  |  |          |
|--|--|----------|
|  |  | 065.0036 |
|--|--|----------|

Burn-out Copings for Variobase® for Crown AS

|  |  | ∅ 4.5 mm (RB/WB) |
|--|--|------------------|
|  |  | 065.0018         |

Basal Screw AS

|  |  |          |
|--|--|----------|
|  |  | 065.0037 |
|--|--|----------|

Burn-out Copings for Variobase® for Bridge/Bar Cylindrical

|  |  | ∅ 4.5 mm (RB/WB)     |
|--|--|----------------------|
|  |  | 065.0017, 065.0017V4 |

Basal Screw

|  |  |          |
|--|--|----------|
|  |  | 065.0036 |
|--|--|----------|

Burn-out Copings for Variobase® for Crown

|  |  | ∅ 5.5 mm (WB) |
|--|--|---------------|
|  |  | 065.0016      |

Basal Screw

|  |  |          |
|--|--|----------|
|  |  | 065.0036 |
|--|--|----------|

Burn-out Copings for Variobase® for Crown AS

|  |  | ∅ 5.5 mm (WB) |
|--|--|---------------|
|  |  | 065.0019      |

Basal Screw AS

|  |  |          |
|--|--|----------|
|  |  | 065.0037 |
|--|--|----------|

Screw-retained Abutments

| GH      | Angle  | ∅ 4.6 mm (RB/WB) |           |           |
|---------|--------|------------------|-----------|-----------|
|         |        | 0°               | 17°       | 30°       |
| 0.75 mm | 1.5 mm | -                | -         | -         |
|         | 2.5 mm | 062.47225        | -         | -         |
|         | 3.5 mm | 062.47235        | -         | -         |
|         | 4.5 mm | 062.47245        | 062.47335 | 062.47435 |
|         | 5.5 mm | 062.47255        | 062.47345 | 062.47445 |

Closed-tray Impression for Screw-retained Abutments

|       |            | ∅ 4.6 mm |
|-------|------------|----------|
| Crown |            | 025.2246 |
|       | Bridge/Bar | 025.0014 |

Open-tray Impression for Screw-retained Abutments

|       |            | ∅ 4.6 mm |
|-------|------------|----------|
| Crown |            | 025.2244 |
|       | Bridge/Bar | 025.0012 |

Burn-out Copings, Plastic

|       |        | ∅ 4.6 mm |
|-------|--------|----------|
| Crown |        | 023.4748 |
|       | Bridge | 023.4758 |

Burn-out Coping for Variobase® for Bridge/Bar Cylindrical

|  |  |          |
|--|--|----------|
|  |  | 023.0032 |
|--|--|----------|

Variobase® for Bridge/Bar Cylindrical

|       |        | ∅ 4.6 mm |
|-------|--------|----------|
| Crown |        | 023.4747 |
|       | Bridge | 023.4751 |

Titanium Copings

|       |        | ∅ 4.6 mm |
|-------|--------|----------|
| Crown |        | 023.4747 |
|       | Bridge | 023.4751 |

Gold Copings

|       |        | ∅ 4.6 mm |
|-------|--------|----------|
| Crown |        | 023.4753 |
|       | Bridge | 023.4754 |

Occlusal Screw

|  |  |          |
|--|--|----------|
|  |  | 023.4763 |
|--|--|----------|

Lab Processing Screw

|  |        |          |
|--|--------|----------|
|  | L 20mm | 025.0006 |
|  | L 10mm | 025.0052 |

Anatomic Abutments

| GH     | Angle | ∅ 6.0 mm (RB/WB) |          |
|--------|-------|------------------|----------|
|        |       | 0°               | 17°      |
| 2.5 mm |       | 062.4103         | 062.4153 |
|        |       |                  |          |
|        |       |                  |          |
| 3.5 mm |       | 062.4104         | 062.4154 |
|        |       |                  |          |

CARES® Abutments (RB/WB)

TAN

Individually CAD/CAM manufactured

®Novaloc

| GH     | Angle  | ∅ 4.5 mm (RB/WB) |          |  |
|--------|--------|------------------|----------|--|
|        |        | 0°               | 15°      |  |
| 1.5 mm | 0°     | 062.4501         | -        |  |
|        | 15°    | 062.4502         | 062.4507 |  |
|        | 3.5 mm | 062.4503         | 062.4508 |  |
|        | 4.5 mm | 062.4504         | 062.4509 |  |
|        | 5.5 mm | 062.4505         | 062.4510 |  |
|        | 6.5 mm | 062.4506         | 062.4511 |  |
|        | 7.5 mm | -                | 062.4512 |  |

CARES® Abutments (WB)

TAN

Individually CAD/CAM manufactured