


RB / WB Ø 3.5 - Ø 6.5

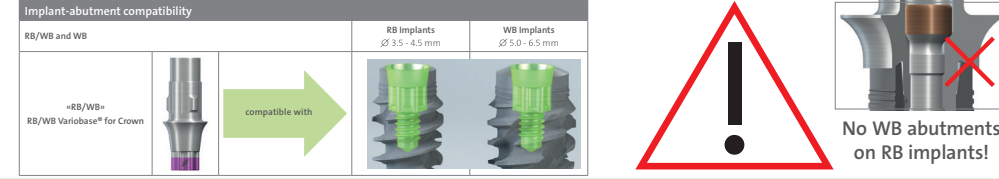

Temporary Abutments for Crown, AH 11 mm

GH	Ø 3.8 mm (RB/WB) Ø 4.5 mm (RB/WB) Ø 6.0 mm (RB/WB)		
	1.5 mm	064.4362	064.4372
2.5 mm	064.4363	064.4373	064.4382
3.5 mm	064.4364	064.4374	064.4383
Incl. Screw		065.0036	

Temporary Abutments for Bridge, AH 5.0 mm

GH	1.5 mm	Ø 4.5 mm (RB/WB)
		064.4352
Incl. Screw		065.0036



Variobase® for Crown, AH 5.5 mm

GH	Ø 3.8 mm (RB/WB) Ø 4.5 mm (RB/WB)	
	1.5 mm	062.4934
2.5 mm	062.4935	062.4945
3.5 mm	062.4936	062.4946
Incl. Screw		065.0036

Variobase® for Bridge/Bar Cylindrical, AH 3.5 mm

GH	1.5 mm	Ø 4.5 mm (RB/WB)
		062.4961
Incl. Screw		065.0036

Burn-out Copings for Variobase® for Crown

Ø 3.8 mm (RB/WB) Ø 4.5 mm (RB/WB)	
	065.0014 065.0015

Burn-out Coping for Variobase® for Bridge/Bar Cylindrical

Ø 4.5 mm (RB/WB)
065.0017

Variobase® for Crown AS, AH 5.5 mm

GH	Ø 4.5 mm (RB/WB)	
	1.5 mm	062.4972
Incl. Screw		065.0037
13 mm	046.786	
21 mm	046.787	
27 mm	046.788	

Burn-out Coping for Variobase® for Crown AS 25°

Ø 4.5 mm (RB/WB)
065.0018

Variobase® C for Sirona® Cerec

GH	Ø 3.8 mm (RB/WB) Ø 4.5 mm (RB/WB)	
	1.5 mm	062.4981
Incl. Screw		065.0036

Novaloc®

GH	Ø 3.8 mm (RB/WB)	
	Angle	0° 15°
1.5 mm	062.4501	—
2.5 mm	062.4502	062.4507
3.5 mm	062.4503	062.4508
4.5 mm	062.4504	062.4509
5.5 mm	062.4505	062.4510
6.5 mm	062.4506	062.4511
7.5 mm	—	062.4512

Processing Package titanium

2010.601-NOV

Processing Package PEEK

2010.611-NOV

Novaloc®

2010.731-NOV
2010.741-NOV
2010.751-NOV

SRA Screw-retained Abutments

GH	Ø 4.6 mm (RB/WB)		
	Angle	0° 17° 30°	
1.5 mm	062.4722S	—	—
2.5 mm	062.4723S	—	—
3.5 mm	062.4724S	062.4733S	062.4743S
4.5 mm	062.4725S	062.4734S	062.4744S
5.5 mm	—	062.4735S	062.4745S

SRA Burn-out Copings, Plastic

Crown/Bridge	Ø 4.6 mm	
		023.4748
Incl. Screw		023.4763

SRA Protective Caps

H	Ø 4.6 mm	
	4.5 mm	024.0020-04
5.1 mm	024.4323-04	024.4324-04
6.6 mm	024.4324-04	024.4325-04
8.1 mm	024.4325-04	—

Variobase® for Crown, AH 5.5 mm

GH	Ø 5.5 mm (WB)	
	0.75 mm	062.4953
1.5 mm	062.4954	—
Incl. Screw		065.0036

Burn-out Coping for Variobase® for Crown

Ø 5.5 mm (WB)
065.0016

Variobase® for Bridge/Bar Cylindrical, AH 3.5 mm

GH	Ø 4.5 mm (RB/WB)	
	1.5 mm	062.4961
Incl. Screw		065.0036

Burn-out Coping for Variobase® for Bridge/Bar Cylindrical

Ø 4.5 mm (RB/WB)
065.0017

Anatomic Abutments

GH	Ø 6.0 mm (RB/WB)	
	Angle	0° 17°
2.5 mm	062.4103	062.4153
3.5 mm	062.4104	062.4154
Incl. Screw		065.0036

RB/WB Pre-milled Abutment Blank

Ø	Medentika Holder	
	11.5mm	062.4601
15.8mm	062.4602	062.4603
12mm	Amann Girrbach	062.4603
Incl. Screw		065.0036

Handpiece Screwdrivers

046.410
046.411
046.412

Manual Screwdrivers

046.400 13mm
046.401 21mm
046.402 27mm

Ratchet and Torque Control Device

046.119
046.049

SRA Titanium Copings Regular

Crown/Bridge	Ø 4.6 mm	
		023.4747
Incl. Screw		023.4763

SRA Lab Processing Screw

L 20mm	025.0006
L 10mm	025.0052

SRA Titanium Coping Slim

Crown/Bridge	Ø 4.6 mm	
		024.0023
Incl. Screw		023.4763

SRA Occlusal Screw

023.4763

SRA Variobase® for Bridge/ Bar Cylindrical

Crown/Bridge	Ø 4.6 mm	
		023.0028
incl. screw		023.4763

SRA Burn-out Coping for Variobase® for Bridge/Bar Cylindrical

Ø 4.6 mm
023.0032

Variobase® for Crown AS, AH 5.5 mm

GH	Ø 5.5 mm (WB)	
	1.5 mm	062.4971
Incl. Screw		065.0037
13 mm	046.786	
21 mm	046.787	
27 mm	046.788	

Burn-out Coping for Variobase® for Crown AS 25°

Ø 5.5 mm (WB)
065.0019

WB Variobase® C for Sirona®

GH	Ø 5.5 mm (WB)	
	5.5 mm	062.4983
Incl. Screw		065.0036

Abutment Basal + VB Basal Screw

065.0036

Basal Screw VB AS

065.0037

Abutment removal kit




RB/WB Abutment-Removal Screw		for removal of damaged abutments, TAN	065.0007
Removal Tool		for BLX Basal Screw, left-hand, length 27 mm, stainless steel	065.0008
		for BLX Basal Screw, left-hand, length 21 mm, stainless steel	065.0009

Abutment removal kit

RB/WB Abutment-Removal Screw		for removal of damaged abutments, TAN	065.0007
Removal Tool		for BLX Basal Screw, left-hand, length 27 mm, stainless steel	065.0008
		for BLX Basal Screw, left-hand, length 21 mm, stainless steel	065.0009

RB/WB prosthetics – fit on RB and WB implants (Ø 3.5 mm - Ø 6.5 mm)


- crowns with slim emergence profiles
- bridges

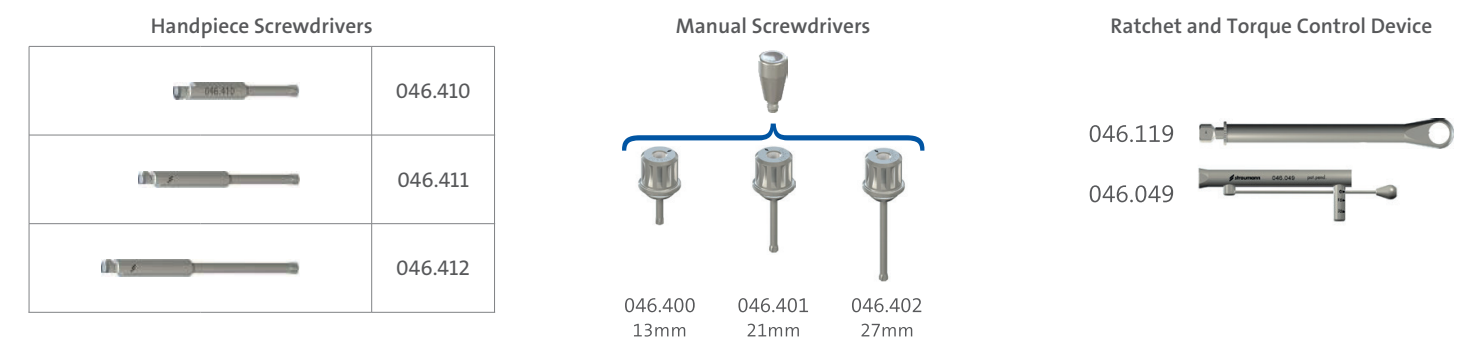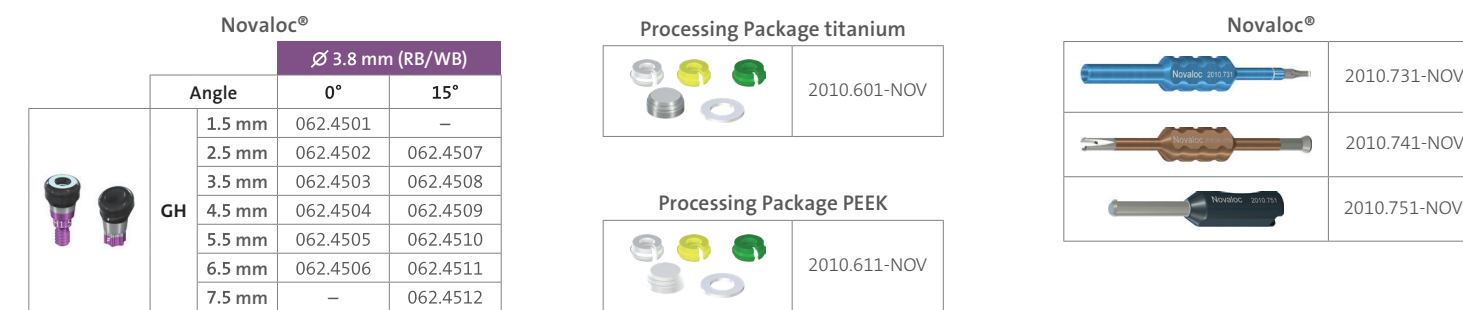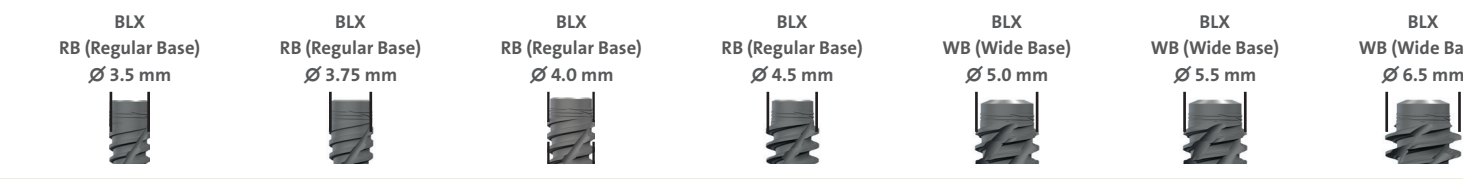

Screw - Retained

Straumann® BLX Implant TorcFit™ Connection

RB / WB Ø 3.5 - Ø 6.5

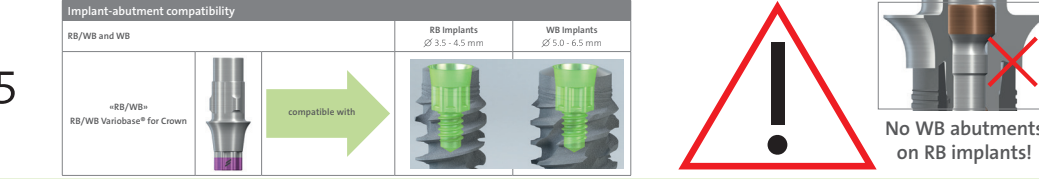

SRA Closed-tray Impression for Screw-retained Abutments

Crown/Bridge/Bar	Ø 4.6 mm	
		025.2246

Straumann® CARES® Scanbody for Screw-retained Abutments

Ø 4.6 mm	025.0001
----------	----------

SRA Open-tray Impression for Screw-retained Abutments

Crown/Bridge/Bar	Ø 4.6 mm	
		025.2244

Straumann® Metal Scanbody for Screw-retained Abutment

Ø 4.6 mm	025.0081
----------	----------

SRA Analog



Abutment Analog	023.4756
-----------------	----------

SRA Analog - Digital

Repositionable Analog דיסקי	025.0008
-----------------------------	----------

Plan Abutment for Screw-retained Abutments

RB/WB Plan Abutment	Material	Part No.
for Screw-retained Abutments, angulation 0°, gingiva height 1.5/2.5/3.5/4.5 mm	POM	025.0073V4
for Screw-retained Abutments, angulation 17°, gingiva height 3.5/4.5/5.5 mm		025.0074V4
for Screw-retained Abutments, angulation 30°, gingiva height 3.5/4.5/5.5 mm		025.0075V4

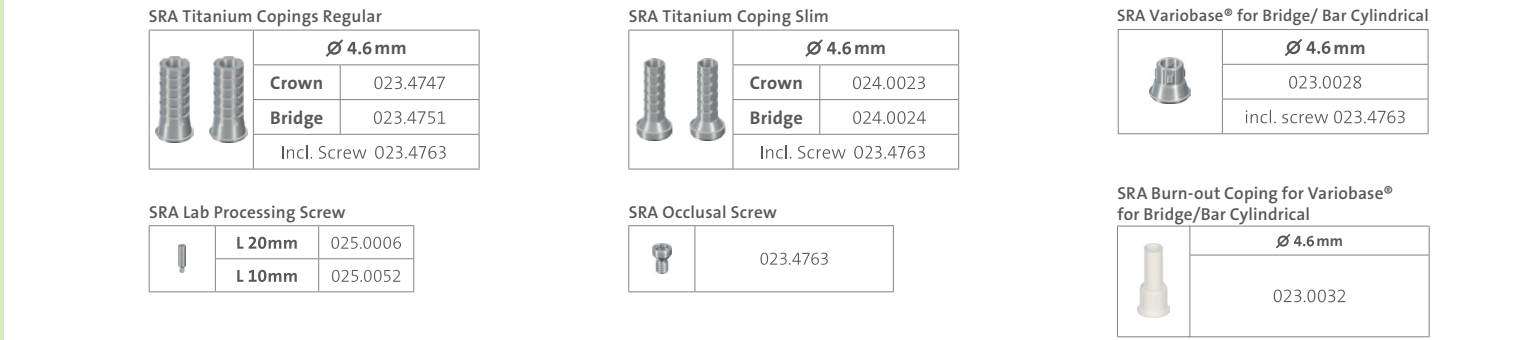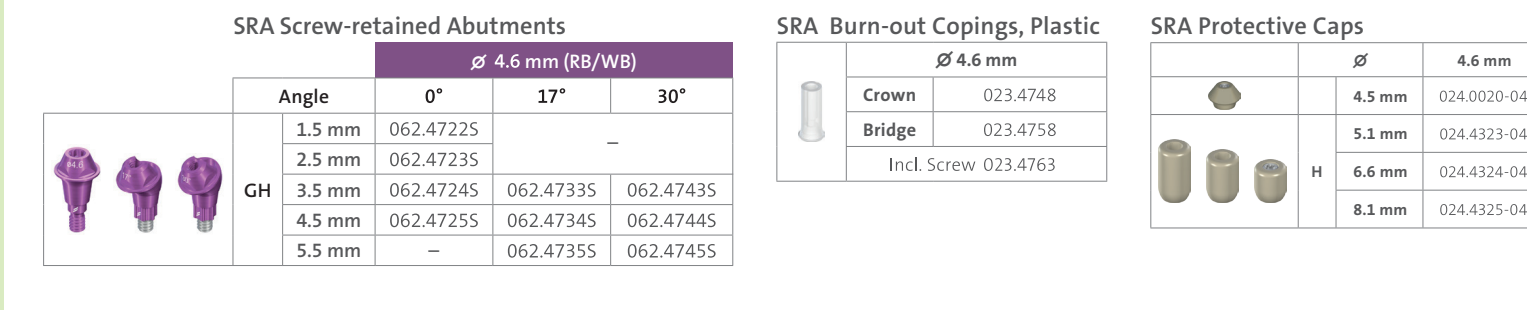

Screw - Retained

Abutment removal kit

RB/WB Abutment-Removal Screw		for removal of damaged abutments, TAN	065.0007
Removal Tool		for BLX Basal Screw, left-hand, length 27 mm, stainless steel	065.0008
		for BLX Basal Screw, left-hand, length 21 mm, stainless steel	065.0009